

REACT

QUALITY FIRST

G300 WHEEL LOADER - 120HP

SPEC SHEET

SPECIAL FEATURES

- 3 ton Lifting Capacity
- 130HP Cummins Engine 6BT5.9-C130-II
- Extensive Pre-Delivery Service
- Genuine Cummins 2 Year Warranty
- Engine Inspected by Cummins
- Long Life Coolant
- 35 km/h Road Speed
- 1.6m³ General Purpose Bucket
- Pallet Forks (Standard)
- Hay Forks (Standard)
- Steering Priority Valve
- Hydraulic Pilot Control
- Tires 14ply / 17.5-25
- Deluxe Cab
- Auto Forward Reverse
- Hydraulic Quick Release Hitch
- Float Function
- 3rd Function Hydraulics
- Reverse Camera / Alarm
- FM Radio, Fire Extinguisher, Drink Holder & Glass Breaker
- Adjustable Steering Column
- Sound Proofing, Cab Fan & Sun Visor
- Hand Park Brake
- UV Protected Windows
- Australian Standard Air Conditioning
- LED Lights, Blinkers, Hazards
- Adjustable Mirrors
- Good Access to Filters, A/C & Engine Components

Options

- Registration
- UHF
- Complete on Road Package

* Finance Available Through Finlease

* Numerous Attachments

IAN EVANS
0427 180 673
IAN@TOUGHINDUSTRIAL.COM.AU

SHANE BLUMSON
0436 521 151
SHANE@TOUGHINDUSTRIAL.COM.AU

LOCATION: 15 CARDIFF CRT. CAVAN. ADELAIDE - SOUTH AUSTRALIA

REACT

QUALITY FIRST

SPEC SHEET



G300 WHEEL LOADER - 130HP

TECHNICAL SPECIFICATIONS - 3 TON CAPACITY

Performance

Rated Load	3,000 kg
Overall Weight	9,000 kg
Bucket Capacity	1.6 m ³
Underbelly Clearance	400 mm
Max. Dump Height	3,200 mm
Max. Dump Reach	980 mm
Overall Dimension	Length 7,050 mm Width 2,430 mm Height 3,100 mm
Min. Turning Radius	5,160 mm

Engine

Model	125 HP Deutz Weichai WP6G125E22
Type	Turbocharged / Water Cooled
Rated RPM	2,200 rpm
Rated Power	130 hp / 97 kw
Max. Torque	670 nm

Service Refill Capacities

Fuel	140 ltr
Hydraulic Oil	80 ltr
Engine Oil	15 ltr
Transmission	39 ltr
Axles x 2	16 ltr

Transmission

Type	Hangchi Powershift Transmission
Gears	4 Speed / Hi/Lo / 2 Rev Gears
Working Pressure	1.6 mpa
Max. Speed	40 km/h

Drive Axle



Main Reducing Spiral	Planetary reduction
Decelerating Mode	
Wheel Base	2,500 mm
Inner Wheel Tread	1,200 mm
Ground Clearance	450 mm

Hydraulic System

System Working Pressure	18.5 mpa
Boom Lifting Time (max load)	5.5 Sec
Lowering Time (empty)	3.5 Sec
Dumping Time (empty)	1.5 Sec
Auto Bucket Level	Yes
3rd Function Oil Flow	180 - 200 lpm

Tyres

Type (tubeless)	19.5-24 pr
Front Tyre Pressure	50 psi
Rear Tyre Pressure	42 psi

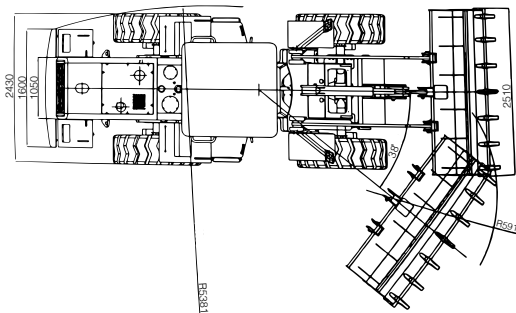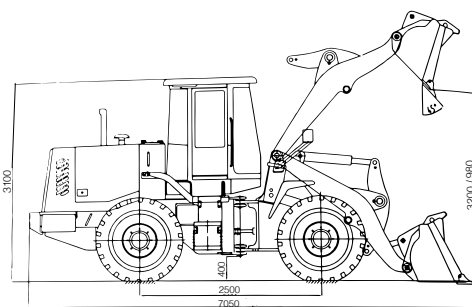

Prices exclude GST

WWW.REACTINTERNATIONAL.COM.AU